


Anziehvorschrift für Zylinderkopf		073.942 passend für / suitable for adaptable à / adaptable a Renault, Nissan, Opel	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			

Schraubenkopf / Head shape
 Tête de vis / Cabeza de tornillo



258.180
M 12x1,5x117,5

Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete

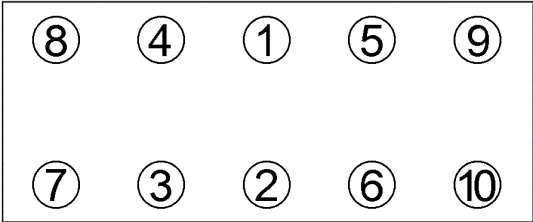

Anziehen/ Tightening/ Serrage/ Apriete	* 30 Nm 30 Nm ► 180 ° +/-25°
---	------------------------------------

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
►	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor
 ⚙ 0,7 mm, Ø 83,8 mm

 Mot.: F4P/F4R
 1,8 ltr./2,0 ltr. 16 V

 Avantime, Clio, Espace, Laguna, Megane, Scenic,
 Trafic, vel Satis, Nissan Primastar, Opel Vivaro

ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	*073.942*
--	------------------