
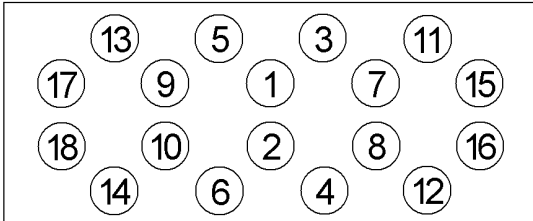


Anziehvorschrift für Zylinderkopf		431.070	 Das Original	
Tightening Instructions for Cylinder Head		passend für / suitable for		
Instructions de serrage pour culasse		adaptable à / adaptable a		
Prescripciones de apriete para culatas		Hyundai / KIA / Mitsubishi		
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete		
				
709.310 M 12x1,25x104				
Anziehen/ Tightening/ Serrage/ Apriete		L 200: 66,85,98 kW Pajero Sport 15 Nm 30 Nm 120±5 Nm		
*		L 200: 73 kW * 29 +/- 2 Nm ➤ 120°		
Zeichenerklärung / Explanations / Explication / Explicacion				
✱	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor				
Ø: 92,5 mm; ✱: 1,45 mm				
Mot: 4D56T 2,5 ltr. TD				
L200 2001- Pajero Classic 2002- Pajero Sport 2002-				
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601			*431.070*	