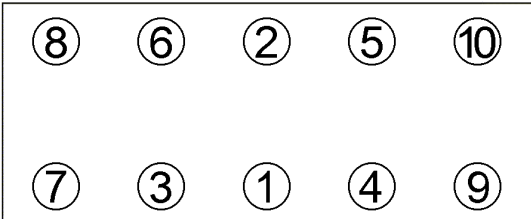


Anziehvorschrift für Zylinderkopf		710.440 passend für / suitable for adaptable à / adaptable a Fiat	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			
Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo		Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete	
 152.080 M10x1,25x254			
Anziehen/ Tightening/ Serrage/ Apriete	* ➤ ➤ ➤	40 Nm 90° 90° 90°	
Zeichenerklärung / Explanations / Explication / Explicacion			
* ★ □ ● ➤	neue Zylinderkopf- schrauben verwenden Warmlauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
Motortyp / Engine type / Type de moteur / Tipo de motor 1747 ccm 16V Fiat: Brava,Bravo,Barchetta,Coupé,Marea,Punto Mot. 182.A1.000, 182.A2.000, 183.A1.000 Alfa: 145, 146, 155, 156, Spider, GTV Mot. AR67106, AR32201, AR67199 Lancia: Delta, Dedra, Lybra			
ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601		*710.440*	