
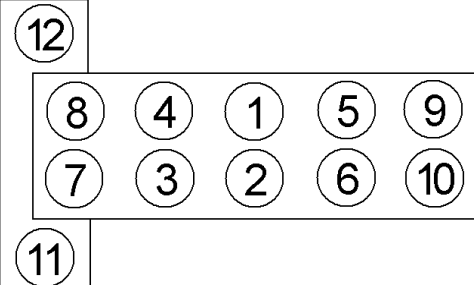


Anziehvorschrift für Zylinderkopf		808.134 passend für / suitable for adaptable à / adaptable a Opel	 Das Original
Tightening Instructions for Cylinder Head			
Instructions de serrage pour culasse			
Prescripciones de apriete para culatas			

Schraubenkopf / Head shape Tête de vis / Cabeza de tornillo 	Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete 
---	--

125.930
M8x1,25x119

Anziehen/	★	25 Nm
Tightening/	➤	60°
Serrage/	➤	60°
Apriete	➤	60°

Zeichenerklärung / Explanations / Explication / Explicacion

★	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
☐	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

1,2 / 1,4 ltr.

Corsa C, Agila Z12XE, Z12XEP
 43000001-, 44000001-, 46000001-
 Astra G X12XE, Z12XE
 42000001-, 45000001-, 46000001-, 48000001-
 Astra H Z12XEP
 Corsa C, Astra G, Z14XEP

ElringKlinger AG, Max-Eyth-Str.2 72581 Dettingen / Erms. Tel. 07123/724 601	*808.134*
--	------------------